


SPL350-Pro is an industrial-grade long-range single-point LiDAR. It's designed for intelligent transportation, industrial drones, automobiles, industry and other applications. As a member of SPL300 series, SPL350-Pro's measuring frequency can also reach 10KHz. And, multiple communication interfaces are supported in its IP67 high-intensity casing. With integrated compensating algorithm for outdoor glare and other interference, SPL350-Pro can work under rain, fog and snow conditions¹. Multiple built-in operating modes let customers to change its parameters and configuration to meet different applications.

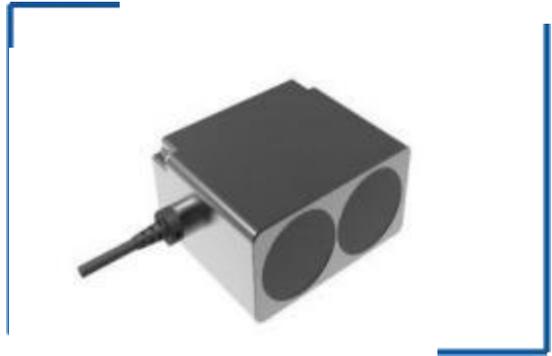

Main product features

- High frame rate
- IP67 protection
- Long range
- Various interface

Main application scenarios

- Vehicle collision avoidance and safety warning
- Traffic flow statistics
- Camera trigger
- UAV assisted takeoff and landing

SPECIFICATIONS

Parameters		Standard version	RS485/RS232 version
Product performance	Range (Indoor, no ambient light)	0.2~350m@90% reflectivity 0.2-110m@10% reflectivity	
	Range (Outdoor @ 100Klux)	0.2-300m@90% reflectivity 0.2-100m@10% reflectivity	
	Accuracy ²	±10cm (within 10m), 1% (10m and further)	
	Distance resolution	1cm	
	Frame rate ³	1Hz~1000Hz adjustable (default 100Hz)	
	Repeatability	1σ : <3cm	
	Ambient light immunity	100Klux	

¹ Rain, snow and fog conditions generally refer to moderate rain, snow and below. Moderate rainfall < 25mm/24h or < 7.9mm/h.

² The detection range is measured at temperature of 25°C. Accuracy and repeatability are measured with white board (90% reflectivity).

³ The highest frame rate can be customized to 10KHz, please contact us for detailed information.

	Enclosure rating	IP67	
Optical parameters	Light source	LD	
	Central wavelength	905nm	
	Photobiological safety	Class1 (EN60825)	
	FOV ⁴	0.35°	
	Supply voltage	5V~24V	
Electrical parameters	Average current	≤150mA @ 5V , ≤80mA @ 12V , ≤50mA @ 24V	
	Power consumption	≤1W	
	Communication interface level	LVTTTL (3.3V)	RS485/RS232
	Communication interface	UART/CAN	RS485/RS232
	Others	Dimension	78mm*67mm*40mm (L*W*H)
Enclosure material		Aluminum alloy	
Operation temperature		-25~60℃	
Storage temperature		-40~85℃	
Weight		222g±3g	225g±3g
Cable length		70cm	

DIMENSIONS

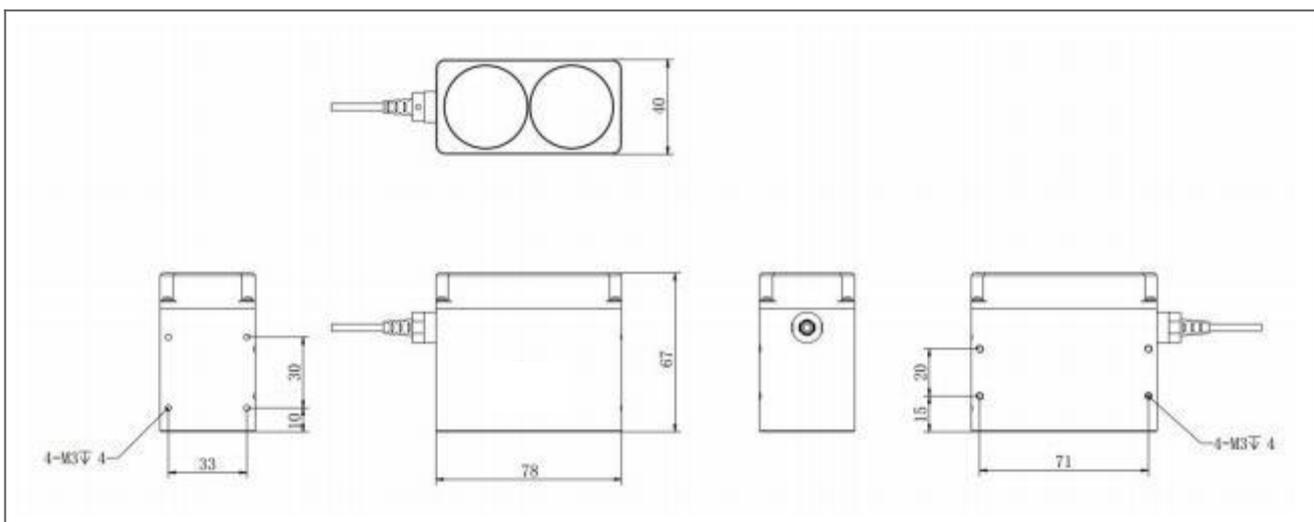


Figure 1 SPL350-Pro dimensions (Left 1: top view; Left 2: upward view; Left 3: front view) Unit: mm

⁴ FOV, field of view, consists of vertical angle and horizontal angle.

■ COMMUNICATION

Parameters	UART/RS485/RS232
Baud rate	115200
Data bit	8
Stop bit	1
Checksum bit	N/A

Parameters	CAN
Baud rate	1000kbps
Data bit	0x3003
Stop bit	0x3
Frame format	Standard frame ⁵

■ CONFIGURABLE PARAMETERS

Table 1 Configurable parameters example

Configurable parameters	Description	Default setting
Frame rate	Output frame rate could be configured by related command, range 1~1000Hz ⁶	100Hz
Communication interfaces	UART/CAN can be switched with command	UART
	RS485/RS232 can be switched with command	RS485
Baud rate	a) Serial port baud rate could be customized b) CAN port baud rate could be customized, CAN ID could be modified	/
Restore default	SPL300-180 can be restored to the factory settings	/
Save configuration	After defining the configuration parameters, you can send the corresponding command to choose to save the configuration permanently	/

Note: for more configurable parameters and instructions, please refer to the user manual.

⁵ Please check User manual for detailed information.

⁶ The highest frame rate can be customized to 10KHz, please contact us for detailed information.

The connector of SPL350-Pro is Molex 1.25 W/B SD-51021-0700.

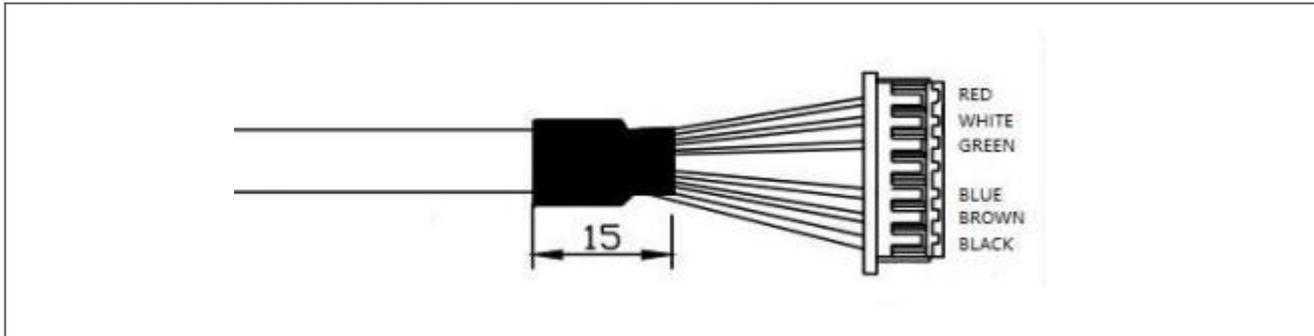


Figure 2 Wiring of

SPL350-Pro Below is SPL350-Pro's pin definition and function

No.	Color	Standard version		RS485 version	
		PIN definition	Function	PIN definition	Function
1	Red	VCC	Power supply	VCC	Power supply
2	White	CAN_L	CAN_L	RS485-B/RS232-RX	RS485-B/RS232 receive
3	Green	CAN_H	CAN_H	RS485-A/RS232-TX	RS485-A/RS232 transport
4	/	/	/	/	/
5	Blue	UART_RX	UART receive	UART_RX	UART receive(debug) ⁷
6	Brown	UART_TX	UART transport	UART_TX	UART transport(debug)
7	Black	GND	Ground	GND	Ground

CERTIFICATIONS



Technical support: support@SentiAcu.com

⁷ The UART interface of SPL350-Pro RS485 version is debugging interface. It cannot be used to read detection data.